

VC-4MX-M 144 F

Compact 4MP CMOS Digital Camera with CoaXPress Interface



The VC-4MX-M144 F, a very compact solution for easy system integration, is based on the CMOS global shutter imager. The VC-4MX camera features 4 megapixel resolution with frame rate up to 144 fps. This combination of global shutter, resolution and frame rate sets a new standard for industrial, scientific and surveillance digital imaging applications. Customers in the industrial market can take advantage of common coax cabling to transmit images at rates and distance above and beyond previous standards.

With this camera, image data can be transmitted at up to 6.25 Gbps using a single coaxial cable. Featuring high quality image and high speed, this camera is ideal for wide range of demanding applications including PCB and semiconductor inspections.

VIEWORKS

vision.vieworks.com

VC-4MX-M 144 F

Compact 4MP CMOS Digital Camera with CoaXPress Interface

Main Features

- 4 Megapixel Resolution
- Global Shutter CMOS Technology
- CoaXPress Interface up to 144 fps at 6.25 Gbps
- Reverse X / Reverse Y
- Defective Pixel Correction
- Low Noise with Optimized Heat Treatment
- GenICam Compatible – XML based Control

Applications

- PCB Inspection
- Semiconductor Inspection
- 3D Inspection
- High-end Surveillance


Specifications

Model	VC-4MX-M 144 F	
Resolution (H × V)	2048 × 2048	
Sensor	AMS CMOSIS CMV4000	
Sensor Size (Optical Format)	11.26 mm × 11.26 mm (1")	
Sensor Type	High Speed CMOS Image Sensor	
Pixel Size	5.5 μm × 5.5 μm	
Interface	CoaXPress (CXP-6 × 1 CH / DIN connector)	
Max. Frame Rate	144 fps @ 6.25 Gbps	
Exposure Time (1 μs step)	1 μs – 60 s	
Partial Scan (Max. Speed)	16394 fps at 4 Lines	
Pixel Data Format	Mono 8	
Electronic Shutter	Global Shutter	
Trigger Synchronization	Free-Run, Hardware Trigger or CXP	
External Trigger	3.3 V ~ 24.0 V, 10 mA, Logical Level Input, Optically Isolated	
Dynamic Range	53 dB	
Gain Control	1 × ~ 4 ×	
Black Level Control	0 ~ 16 LSB	
Dimension / Weight	40 mm × 40 mm × 41 mm, 200 g (with C-mount)	
Temperature	Operating: -5°C ~ 40°C, Storage: -40°C ~ 70°C	
Lens Mount	C-mount, Custom mount available upon request	
Power	External	10 ~ 24 V DC
	Dissipation	Typ. 3.5 W
	PoCXP	24 V DC
Compliance	CE, FCC, KC	
API SDK	Vieworks Imaging Solution 7.X	


VC-4MX-M 144 F

Compact 4MP CMOS Digital Camera with CoaXPress Interface

Quantum Efficiency Curve

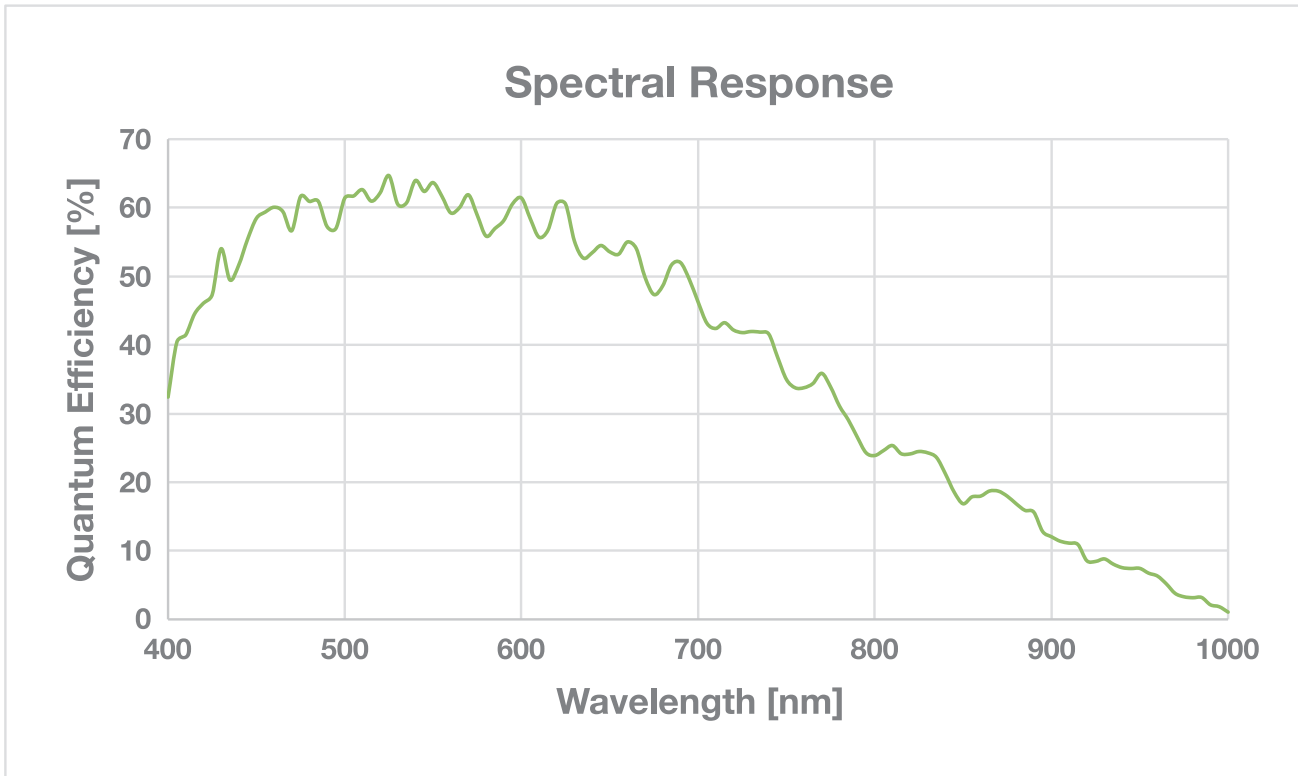


Ordering Scheme

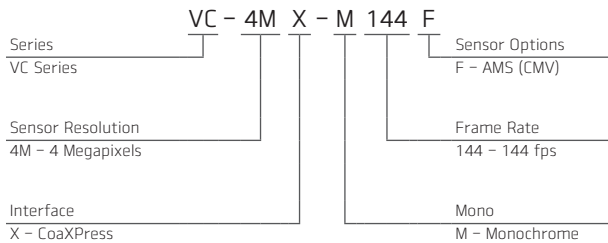

Connector Specification

Power



- 1: +12V DC
- 2: Trigger IN+
- 3: Trigger IN-
- 4: Output+
- 5: Output-
- 6: DC Ground

Data Transfer / Communications



CXP Single Channel
75 Ω, DIN 1.0/2.3

Connectors on camera body

VC-4MX-M 144 F

Compact 4MP CMOS Digital Camera with CoaXPress Interface

Mechanical Dimensions

Unit: mm

