



PIXIS-XO: 100B

1340 x 100 imaging array | 20 x 20 µm pixels | Direct detection

The PIXIS-XO series of fully integrated imaging cameras utilizes back-illuminated (BI) and back-illuminated, deep-depletion (BR) CCDs without AR coating, for direct detection of the widest range of X-rays between  $\sim 10$  eV and 30 keV (AR coated devices are not useful for X-ray energies < 500eV). With a 1340 x 100 imaging array, 20 µm pixels, 100% fill factor, low noise electronics and -90° C thermoelectric cooling with either air or water, this system is ideal for worry-free operation in research and OEM environments. The rotatable conflat flange with high-vacuum-seal design, software selectable gains and readout speeds make these cameras well suited for ultra-high vacuum applications.

| FEATURES  | BENEFITS  |
|---|---|
| Back-illuminated deep depletion and back-illuminated CCD, with no AR coating                            | Provides very low X-ray flux imaging, high sensitivity and high spatial resolution  |
| 2 Mhz / 16-bit readout<br>100 kHz / 16-bit readout  | High speed readout for rapid image acquisition; Slow speed readout for high sensitivity with wide dynamic range, high signal-to-noise ratio (SNR) and excellent energy resolution |
| Software selectable gains for each digitization speed   | Allows optimization of system performance for lowest noise to highest SNR   |
| 1340 x 100 image area,<br>20 x 20 µm pixels   | Spectroscopy format designed for high frame rate imaging  |
| Ultra low noise electronics   | Best possible system performance  |
| Flexible user-selectable binning & readout  | Total flexibility to optimize experiments and SNR   |
| Kinetics  | Custom readout mode offers microsecond resolution   |
| Deep thermoelectric air cooling   | Maintenance-free operation - NO need for a liquid circulator or additional power supply   |
| Deep thermoelectric water cooling   | Vibration-free operation  |
| Conflat vacuum interface  | Industry-standard, high-vacuum compatibility  |
| TTL input and output  | External Trigger input with programmable polarity; TTL output with exposure or readout monitor  |
| USB 2.0 interface   | Seamless, plug-and-play connection to PC notebooks & desktops; Easy OEM integration   |
| Optional: LightField® (for Windows 10/8/7, 64-bit) Or WinView/Spec (for Windows 8/7/XP, 32-bit)         | Flexible software packages for data acquisition, display and analysis with built in math engine; LightField offers intuitive, cutting edge user interface and more.               |
| PICAM (64-bit) / PVCAM (32-bit) software development kits (SDKs)  | Compatible with Windows 10/8/7 (64-bit), and Linux (contact factory for an update) Universal programming interfaces for easy custom programming.                                  |
| $LabView ^{ \tiny{\textcircled{\tiny R} }} \ Scientific \ Imaging \ ToolKit \ (SITK^{\text{\tiny TM}})$ | Predefined VIs for easy integration of camera controls into large experiment  |

### **Applications:**

X-ray Spectroscopy, EUV Lithography and X-ray Plasma Diagnostics

PIXIS-XO:100 Rev. P1 Page 1 of 5

# **SPECIFICATIONS**

|   | PIXIS-XO: 100B  | PIXIS-XO: 100BR   |  |
|---|---|---|--|
| CCD Image Sensor  | Princeton Instruments exclusive; scientific-grade 1; MPP; back-illuminated (BI); no AR coating (B) for sensitivity between ~10 eV to 20 keV.                              | Princeton Instruments exclusive;<br>scientific-grade 1; NIMO; back-illuminated<br>deep-depletion (BR); no AR coating for sensitivity<br>between ~10 eV to 30 keV. |  |
| Dark current $@$ -75 $^{\circ}$ C (with ambient air $@$ +20 $^{\circ}$ C) | 0.001 e-/p/sec (typical)<br>0.005 e-/p/sec (max)  | 0.03 e-/p/sec (typical)<br>0.065 e-/p/sec (max)   |  |
| CCD format  | 1340 x 100 imaging pixels; 20 x 20 μm pixels; 10  | 00% fill factor; 13.3 x 13.3 mm (optically centered)  |  |
| Deepest cooling temperature, TE air cooling* (with ambient air @ +20° C)  | -90° C typical; -75° C guaranteed   |   |  |
| Thermostating precision   | ±0.05° C  |   |  |
| Cooling method  | Thermoelectric air or liquid cooling (CoolCUBE II required)   |   |  |
| Full well   | Single pixel: 100 ke- (typical), 60 ke- (minimum)  High Sensitivity node: 250 ke- (typical), 220 ke- (minimum)  High Capacity node: 1000 ke- (typical), 750 ke- (minimum) |   |  |
| ADC speed/bits  | 100 kHz/16-bit and 2 MHz/16-bit   |   |  |
| System read noise @100 kHz<br>@2 MHz                                      | 3.0 e- rms (typical), 5 e- rms (max) 11 e- rms (typical), 16 e- rms (max)   |   |  |
| Vertical shift speed  | <15 μsec/row (programmable)   |   |  |
| Non-linearity   | <1% @ 100 kHz<br><2% @ 2 MHz  |   |  |
| Software selectable gains   | 1, 2, 4 e- (high sensitivity); 4, 8, 16 e- (high capacity); available at all speeds   |   |  |
| Data interface  | USB2.0 (5m interface cable provided); Optional Fiberoptic interface is available for remote operation   |   |  |
| I/O signals   | Two MCX connectors for programmable frame readout, shutter, trigger in  |   |  |
| Operating environment   | +5° C to +30° C non-condensing  |   |  |
| Bakeout temperature   | 70° C (maximum)   |   |  |
| Vacuum Compatibility  | 10 <sup>-8</sup> Torr   |   |  |
| Certification   | CE  |   |  |
| Dimensions / Weight   | 16.59 cm (6.53") x 11.81 cm (4.65") x 11.38 cm (4.48") (L x W x H) / 2.27 kg (5 lbs)  |   |  |

### All specifications subject to change


# **Spectral Rates**

| @100 kHz Full Vertical Binning (FVB) |                             | 70 fps   |
|--------------------------------------|-----------------------------|----------|
| @ 2 MHz                              | Full Vertical Binning (FVB) | 750 fps  |
| @ 2 MHz                              | (0.2 mm high)               | 1300 fps |

PIXIS-XO:100 Rev. P1 Page 2 of 5

<sup>\*</sup> The minimum temperature attainable is dependent on the vacuum condition - temperature can be lowered w/lower vacuum

# **Quantum Efficiency Curve**

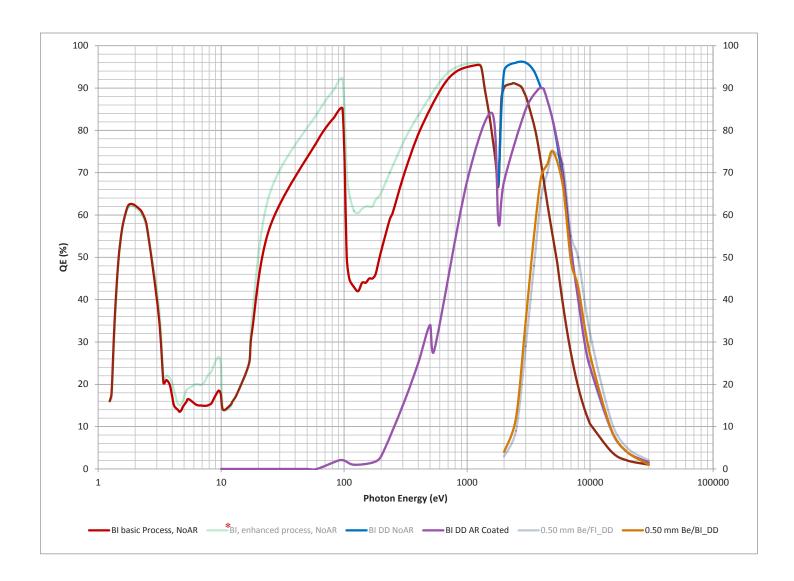



\* - For reference purpose only

PIXIS-XO:100 Rev. P1 Page 3 of 5

## **OUTLINE DRAWING**

## 4.5" Conflat

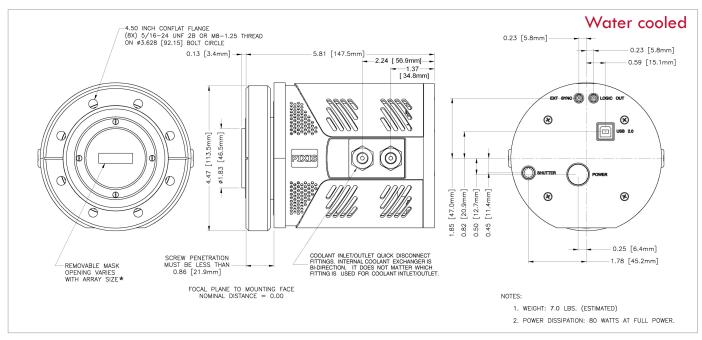

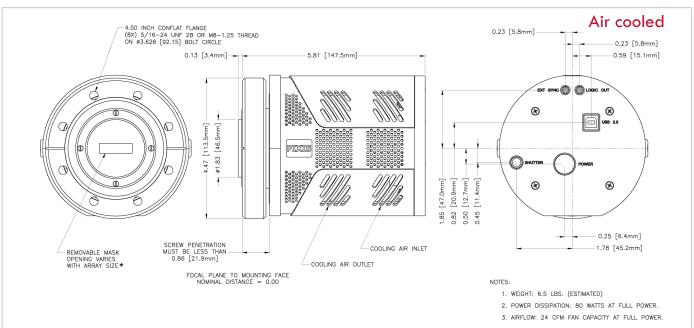



| CCD Array  | CCD Image Area inches (mm) | Mask Opening<br>± .001 inches (± .0254 mm) |
|------------|----------------------------|--|
| 1340 x 100 | 1.055 x 0.787 (26.8 x 2.0) | 1.052 x 0.076 (26.721 x 1.930)             |

PIXIS-XO:100 Rev. P1 Page 4 of 5

## **OUTLINE DRAWING**

## 6.0" Conflat

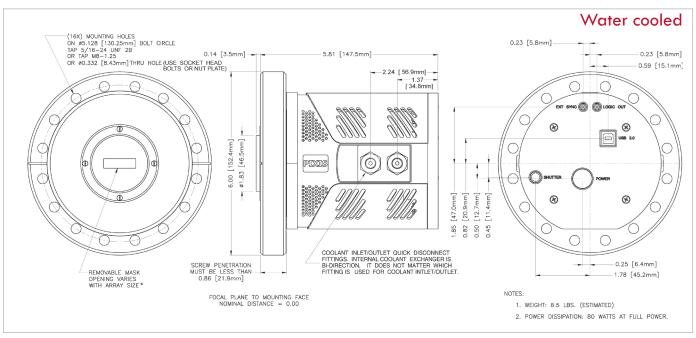

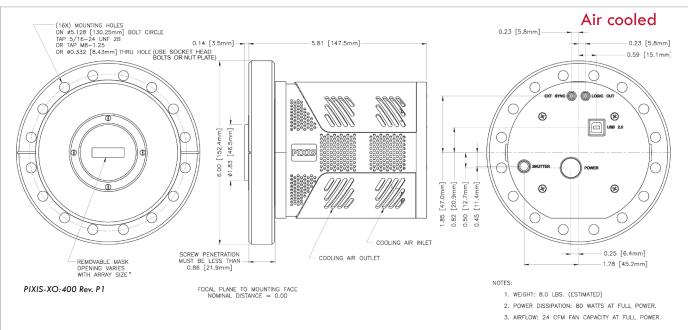

| CCD Array  | CCD Image Area inches (mm) | Mask Opening<br>± .001 inches (± .0254 mm) |
|------------|----------------------------|--|
| 1340 x 100 | 1.055 x 0.787 (26.8 x 2.0) | 1.052 x 0.076 (26.721 x 1.930)             |

PIXIS-XO:100 Rev. P1 Page 5 of 5